

ACTORIS PARLED

COMPACT, SILENT, AND EFFICIENT RGBWW PARLED, PERFECT FOR USE IN ANY THEATRE OR VENUE

- **Light Source:**
7 x 40W RGBWW Osram LEDs
- **Output:**
3,400 lm
- **Zoom Range:**
4°-53°
- **CloudIO Ready:**
Fully compatible with CloudIO



There is an increasing demand for smaller, silent, and simpler light fixtures that produce an excellent and efficient light beam. The ACTORIS PARLED embodies these qualities in a small form factor fixture that only weighs **6 kilograms** and is **306 mm** in length.

First in a series of specialized models for the theatrical sector, this product features an **RGBWW LED light**

source, that produces **warm color temperatures** perfect to match any complexion or scenery on stage through its replication of **natural pastel colors** and **CRI rating greater than 90**. The color temperature can also be digitally adjusted between **2500K through 6500K**.

The implementation of a special warm white LEDs does not adversely affect


the luminous efficiency: the ACTORIS PARLED is positioned at the top of its category, featuring a lumen output of **3400 lumens**.

The ACTORIS PARLED ensures **extremely silent operation**, thanks to use of special silenced axial fans.

With a zoom range of **4° to 53° via its motorized zoom, a 24-bit electronic dimmer with five curves**, 4 individually selectable operating modes, and its color range, the ACTORIS PARLED is one of the smallest, most versatile fixtures on the market.

Using the same LED optical system as the Claypaky MINI-B WW range, you can use ACTORIS PARLED with these products for balanced color consistency. Barndoors and frames for frost and gel filters are available as optional accessories.

ACTORIS PARLED is one model being introduced through the new ACTORIS series by ADB, designed specifically for theatres and marketed by Claypaky and its dealer network.

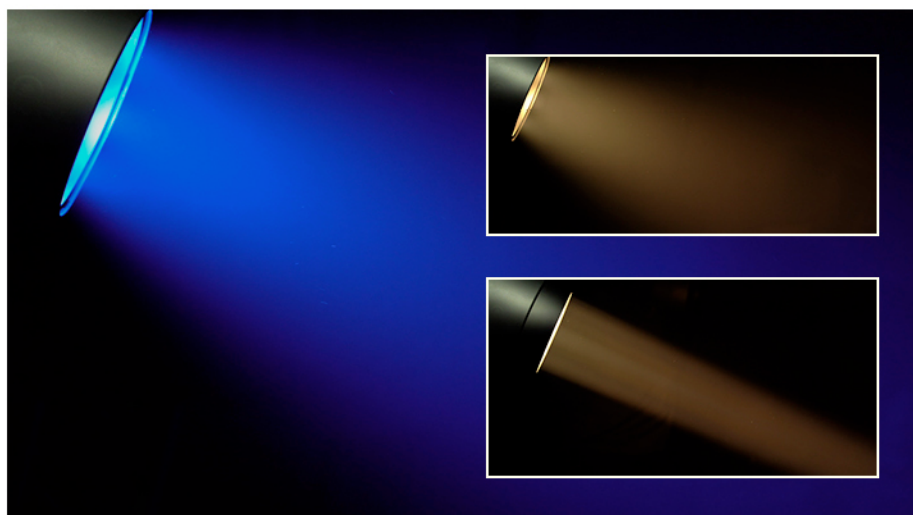

July 2021 - Subject to change without notification

ACTORIS PARLED



MAIN FEATURES

- Light source: 7 x 40W RGBWW Osram LEDs
- Natural CT3200K. 6500K-2500K linear CTB
- Compact and lightweight
- Highly efficient light output (3,400 lm), very low power consumption
- Motorized 4° to 53° zoom range, zoom repositioning with DMX off
- 5-curve, 24-bit dimmer with output color balance
- Pre-installed effects/color macros
- Crossfade channels between color and CTO, and between macros
- Electronic strobe @25 f/s
- Ethernet access
- 4 Operating modes: Constant - Auto - Silent - Theatre
- Control signal: USITT DMX 512. Protocols: RDM, WebServer, Art-Net and sACN
- CloudIO Ready: fully compatible with CloudIO
- Split yoke for hanging or floor mount
- Weight: 6 kg (13.2 lbs)
- Dimensions: fixture housing is 322 mm (12.7 in) long and 195 mm (7.7 in) diameter