

AXCOR WASH 600 HC

EN PHOTOMETRIC DIAGRAMS

ES DIAGRAMAS FOTOMÉTRICOS

IT DIAGRAMMI FOTOMETRICI

FR DIAGRAMMES PHOTOMETRIQUES


DE FOTOMETRISCHE DIAGRAMME

- Key** Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.
Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.
Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.
Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.
Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.

Axcor Wash 600 HC (standard)

Minimum Zoom (6° 10% - 4° 50%)


Total Output: 10700 lumens

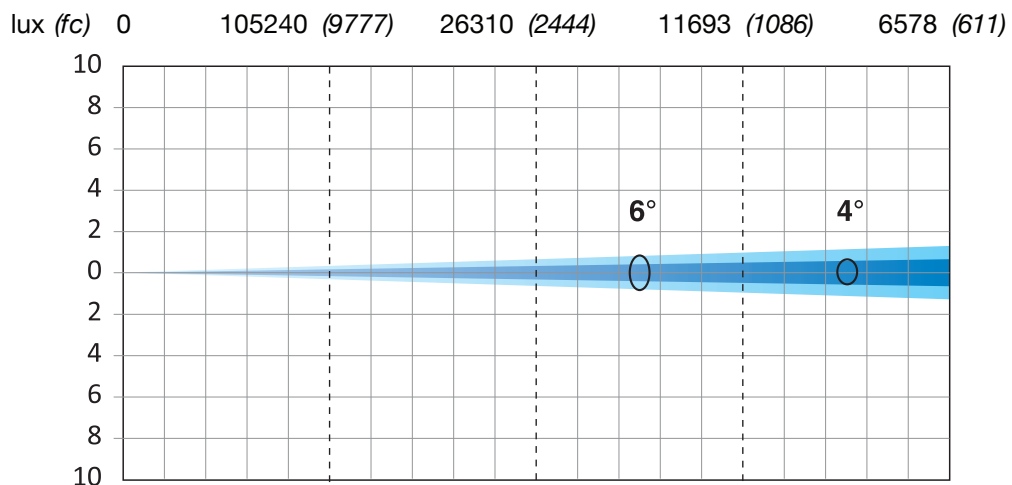

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	0.52 (1' 9")	1.05 (3' 5")	1.57 (5' 2")	2.10 (6' 11")
Diameter 50%	m (ft in)	0	0.35 (1' 2")	0.70 (2' 3")	1.05 (3' 5")	1.40 (4' 7")

Maximum Zoom (48° 10% - 34° 50%)

Total Output: 10700 lumens

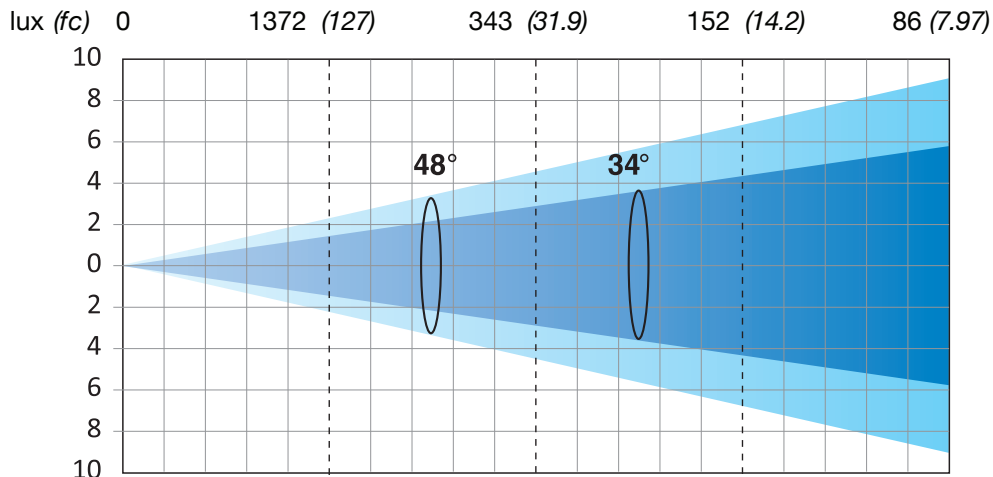

Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter 10%	m (ft in)	0	4.45 (14' 7")	8.90 (29' 3")	13.36 (43' 10")	17.81 (58' 5")
Diameter 50%	m (ft in)	0	3.06 (10' 0")	6.11 (20' 1")	9.17 (30' 1")	12.23 (40' 1")


AXCOR WASH 600 HC

- EN** PHOTOMETRIC DIAGRAMS
- ES** DIAGRAMAS FOTOMÉTRICOS
- IT** DIAGRAMMI FOTOMETRICI
- FR** DIAGRAMMES PHOTOMETRIQUES
- DE** FOTOMETRISCHE DIAGRAMME

Axcor Wash 600 HC (with Fresnel lens kit - CZ1000)

Minimum Zoom (7° 10% - 5° 50%)

Total Output: 9800 lumens

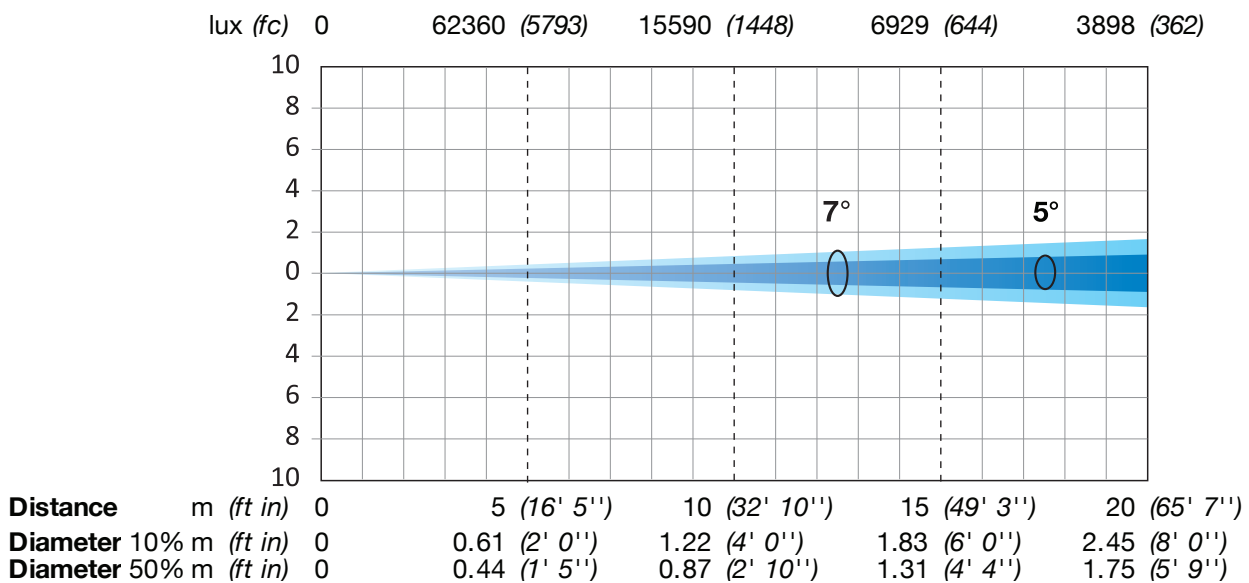

Maximum Zoom (47° 10% - 32° 50%)

Total Output: 9700 lumens

