

SUPER LED F4.7 VW



DATASHEET

Desiti

SUPER LED F4.7 VW

LED Fresnel Spotlight 60W Vari-White - CRI>95

White light, with Tunable Correlated Color Temperature from 2.800 to 6.600°K

OVERVIEW

The Super LED F4.7 Vari-White maintains the high efficiency DE SISTI Internationally Patented optical system for LED FRESNEL while the innovative white phosphors LED ARRAY provides the ability to tune the Correlated Color Temperature from a minimum of 2.800°K to a maximum of 6.600°K with an enhanced CRI (Color Rendering Index) higher than 95 at any CCT within the range.

The Lighting Fixture is DMX Controlled for:

- 0 to 100% with a super smooth Dimming
- STEP MODE for CCT Control: Increments of 400°K every 10% of DMX variation
- CONTINUOUS MODE for CCT control.

The fixture combines the classical SPOT/FLOOD beam control on an equivalent FOCUS RANGE to a conventional lamp fresnel, with an excellent barn door cutting.

It utilizes Standard accessories from the DE SISTI range of equivalent Fresnel Lens size, such as Barndoor, Color Frame, Cones, Scrims.

MODEL	DESCRIPTION
F4.7VW.MO	Super LED F4.7 VW - Tunable CCT, Manual Operated
F4.7VW.PO	Super LED F4.7 VW - Tunable CCT, Pole Operated



WHAT'S INSIDE

FIXTURE HEAD

120 mm. (4.75") diameter Fresnel lens
POWERCON IN & OUT PANEL CONNECTORS.
XLR 5 Pin DMX IN & OUT PANEL CONNECTORS.
60W high output CRI>95 LED with Tunable CCT
from 2.800°K till 6.600 °K
Built In Universal Power Supply 90-250V
50/60Hz DMX controlled.

YOKES

Manual Operated Versions

Mod. LT300.100.40 M.O. stirrup with 16mm
(5/8") socket

Pole Operated Versions

Mod. 301.110.40 P.O. yoke with 28,57 mm.
spigot (B.S. 1-1/8"), with top end for "C" clamp

ACCESSORIES

Mod. 306.100 four leaf rotating barndoor
Mod. 307.100 color frame

CABLES

Mod. 5403.135 3 mt. (9.8 ft) detachable Blue
POWERCON power cable with bare ends.

DMX cable is not included, to be ordered
separately


DeSisti

SUPER LED F4.7 VW


FEATURES

Power to LED	60W - DC current to the LED - flicker free
Rated Voltage & PFC	90-250V 50-60Hz PFC 0,96
Power consumption	71W @ 230V 75W @120V
Power Connection	powerCON IN & OUT
DMX Data link USITT DMX512-A	5-pin XLR for DMX in & out. Use shielded data cables. Do not overload the daisy chain. Up to a maximum of 32 devices can be used on a single DMX chain.
DMX Channels	3: Dimmer/Light Intensity, CCT Control, Mode of CCT Control (steps or continuous)
LED ARRAY Lifetime	50.000 hours with 70% Lumen Maintenance. The LED ARRAYS are tested and certified up to LM80
CCT	Tunable from 2.800°K to 6.600°K
CRI / TLCI	CRI>95 TLCI:96
Protection Type	IP22
Max. Housing Surface Temperature	70° C
Weight of Fixture	M.O. 3,5 Kg (7.7 lb) P.O. 5,4 Kg (11.9 lb)
Weight of Barndoor	4 leaf 0,3 Kg (0.66 lb) 8 leaf 0,4 Kg (0.88 lb)
Weight of color frame	0,13 Kg (0.29 lb)
Barndoor ring diameter	133mm / 5.24"
Scrims & color frame diameter	129mm / 5.08"
Lens diameter	120mm / 4.75"

DIMENSION

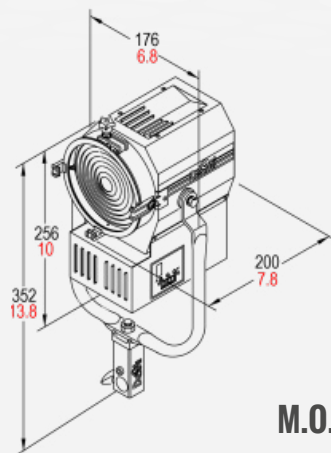

M.O.

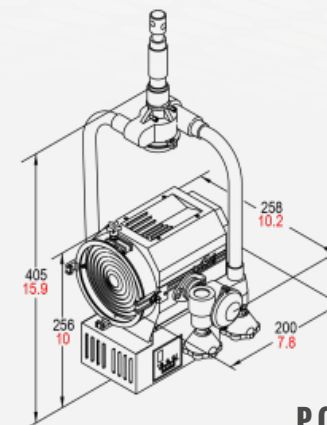

P.O.

FEATURES

120 mm. (4.75") diameter high quality, shock resistant Borosilicate glass Fresnel lens on spring supports.

Rugged and lightweight Carbon Steel Housing with low glare black epoxy powder coating and reinforces internal double walls.

Vari-White CCT technology with a range from 2.800°K to 6.600°K

CRI Greater than 95 at any CCT within the range

High efficiency Self Stabilizing Active Cooling: automatic, thermal stabilization of the LED operating temperature is managed by an internal thermal sensor and CPU, variable speed fan and heat sink to maintain the LED Array's constant temperature at a maximum of 65°C. The hydro dynamic bearing fan operates silently with a very low RPM.

Special Patented Optics for LED Technology.

Helix Screw driven focus mechanism which guides Teflon bushings supported LED ENGINE along 2 rods. This ensures smooth operation during focusing in any tilting position of the fixture. The Teflon bushings also provide a wiping action, which cleans the steel guide rails during focus.

The unit is equipped with a hinged lens door and wire guard. One of the 4 accessory brackets has a spring loaded locking knob to safely secure external accessories.

Accessories have been designed for one hand installation.


Available with either positive lock manual yokes for comfort and ease of handling, or pole operated yokes which can be used via the lighting pole for Panning and Tilting the lights as well as manually, since the mechanical activators are equipped with clutches.

SUPER LED F4.7 VW

TLCI


@2.800°K

De Sisti SUPER LED F4.7 VW - 60W - @2800°K : CCT = P2791 (+0.3)
TLCI-2012: 96 (P2791)

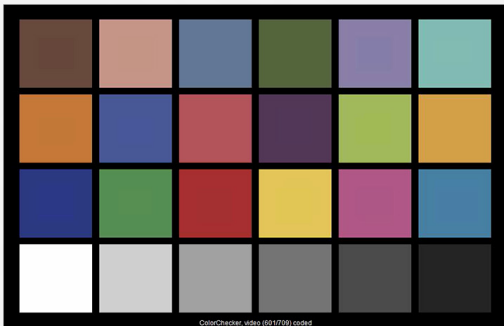

Television Lighting Consistency Index-2012

Sector	Lightness	Chroma	Hue
R	0	0	0
RY	0	0	-
Y	0	0	-
YG	0	0	0
G	0	0	0
G/C	0	0	0
C	0	0	+
C/B	0	0	-
B	0	-	-
B/M	0	0	+
M	0	0	+
M/R	0	0	+




@6.600°K

De Sisti SUPER LED F4.7 VW - 60W - @6600°K : CCT = D6990 (+0.4)
TLCI-2012: 96 (D6990)



Television Lighting Consistency Index-2012

Sector	Lightness	Chroma	Hue
R	0	0	0
RY	0	0	-
Y	0	0	-
YG	0	0	0
G	0	0	0
G/C	0	0	0
C	0	0	-
C/B	0	0	-
B	0	-	-
B/M	0	0	0
M	0	0	0
M/R	0	0	0



PHOTOMETRICS

// SUPER LED F4.7 VW

Central Light intensity (Candle Power)

Illumination center values at Distances

FULL FLOOD - C.C.T. tunable from 2.800°K to 6.600°K - 60W (CRI >95) - TLCI: 96

FLOOD @ 2.800°K CCT	5.058 cd	562 lux <i>52 FC</i>	316 lux <i>29 FC</i>	202 lux <i>19 FC</i>
---------------------	----------	-------------------------	-------------------------	-------------------------


FLOOD @ 6.600°K CCT	5.697 cd	633 lux <i>59 FC</i>	356 lux <i>33 FC</i>	228 lux <i>21 FC</i>
---------------------	----------	-------------------------	-------------------------	-------------------------

FULL SPOT - C.C.T. tunable from 2.800°K to 6.600°K - 60W (CRI >95) - TLCI: 96

SPOT @ 2.800°K CCT	29.556 cd	3.284 lux <i>496 FC</i>	3.005 lux <i>279 FC</i>	1.923 lux <i>179 FC</i>
--------------------	-----------	----------------------------	----------------------------	----------------------------

SPOT @ 6.600°K CCT	36.702 cd	4.078 lux <i>379 FC</i>	2.294 lux <i>213 FC</i>	1.468 lux <i>136 FC</i>
--------------------	-----------	----------------------------	----------------------------	----------------------------

3 mt *9.8 ft* 4 mt *13.1 ft* 5 mt *16.4 ft*

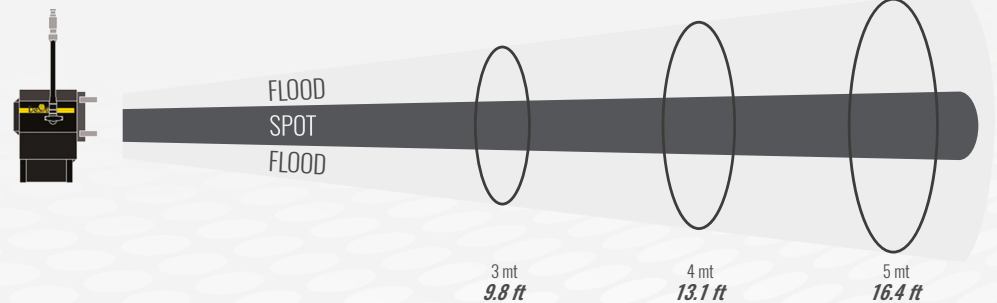

Light beam diameter with Beam Angle (50% of center value)

Beam Sizes

FLOOD	57°	3,26 mt <i>10.7 ft</i>	4,34 mt <i>14.3 ft</i>	5,43 mt <i>17.8 ft</i>
-------	-----	---------------------------	---------------------------	---------------------------

SPOT	12°	0,63 mt <i>2.1 ft</i>	0,84 mt <i>2.8 ft</i>	1,05 mt <i>3.4 ft</i>
------	-----	--------------------------	--------------------------	--------------------------

Light beam diameter with Field Angle (10% of center value)


FLOOD	69°	4,12 mt <i>13.5 ft</i>	5,50 mt <i>18.0 ft</i>	6,87 mt <i>22.5 ft</i>
-------	-----	---------------------------	---------------------------	---------------------------

SPOT	20°	1,06 mt <i>3.5 ft</i>	1,41 mt <i>4.6 ft</i>	1,76 mt <i>5.8 ft</i>
------	-----	--------------------------	--------------------------	--------------------------

LUX AT ANY DISTANCE = Candle Power: [Distance(in m.)]²

FC. AT ANY DISTANCE = Candle Power: [Distance(in ft)]²

SUPER LED F4.7 VW



OPTIONALS & ACCESSORIES

F4.7VW.XO.DIN	<i>add code to order DIN Spigot</i>
305.310	<i>Stainless Steel wire guard</i>
306.100	<i>Four leaf rotating barndoor</i>
306.200	<i>Eight way rotating barndoor</i>
307.100	<i>Color Frame</i>
308.100	<i>Cone with two discs (with front aperture diameter: 70 mm. 50 mm. 30 mm.)</i>
309.100	<i>Set of scrims - Stainless steel</i>
309.101	<i>Full single scrim - Stainless steel</i>
309.102	<i>Full double scrim - Stainless steel</i>
309.103	<i>1/2 single scrim - Stainless steel</i>
309.104	<i>1/2 double scrim - Stainless steel</i>
91.210	<i>Aluminum black painted "C" clamp to hang fixtures overhead and for mounting on pipe with diameters up to 52 mm. (2"), with safety pin (no adapters)</i>
93.101	<i>Extruded black "C" clamp with 16mm. (5/8") stud</i>
93.104	<i>Extruded black "C" clamp with M 8 threaded stud</i>
20.100	<i>Safety cable 800 mm. long with 4 mm. diameter steel rope and safety catch.</i>
302.631	<i>KIT CASE in REINFORCED MOLDED POLYETILEN for 3 LIGHTS AND ACCESSORIES, including:</i> <ul style="list-style-type: none"> - Black Colour - 3 Sides Carrying Handles - Alluminium profiles, Heavy duty cam-lock, hinges and rolling wheels - for: SUPER LED F4.7 kit 300.600 - DLK 380 - DLK3100.