

# HY B-EYE K15

**EN** PHOTOMETRIC DIAGRAMMS

**ES** DIAGRAMAS FOTOMÉTRICOS

**IT** DIAGRAMMI FOTOMETRICI

**FR** DIAGRAMMES PHOTOMETRIQUES

**DE** FOTOMETRISCHE DIAGRAMME

**Key** Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.

**Legenda** Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.

**Legende** Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.


**Leyenda** Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.

**Légende** Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.

## Minimum Zoom - Fan Speed Mode @ FULL (6.7° 10% - 4.7° 50%)

**Total Output: 5000 lumens (FULL COLORS)**

<b>Red</b>	lux (fc)	0	22694 (2108)	8170 (759)	2043 (190)	908 (84.3)
<b>Green</b>	lux (fc)	0	37167 (3453)	13380 (1243)	3345 (311)	1487 (138)
<b>Blue</b>	lux (fc)	0	5128 (476)	1846 (171)	462 (42.9)	205 (19.1)
<b>White</b>	lux (fc)	0	54981 (5108)	19793 (1839)	4948 (460)	2199 (204)
<b>Full colors</b>	lux (fc)	0	94519 (8781)	34027 (3161)	8507 (790)	3781 (351)

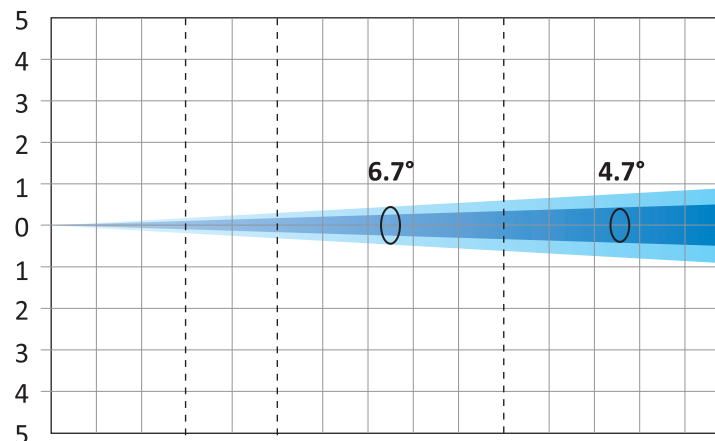

<b>Distance</b>	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
<b>Diameter 10%</b>	m (ft in)	0	0.35 (1' 2")	0.59 (1' 11")	1.17 (3' 10")	1.76 (5' 9")
<b>Diameter 50%</b>	m (ft in)	0	0.25 (0' 10")	0.41 (1' 4")	0.82 (2' 8")	1.23 (4' 0")

# HY B-EYE K15

EN PHOTOMETRIC DIAGRAMMS

ES DIAGRAMAS FOTOMÉTRICOS

IT DIAGRAMMI FOTOMETRICI


FR DIAGRAMMES PHOTOMETRIQUES

DE FOTOMETRISCHE DIAGRAMME

## Maximum Zoom - Fan Speed Mode @ FULL (46° 10% - 30° 50%)

Total Output: 8600 lumens (FULL COLORS)

Red	lux (fc)	0	824 (76.5)	297 (27.6)	74 (6.89)	33 (3.06)
Green	lux (fc)	0	1399 (130)	504 (46.8)	126 (11.7)	56 (5.2)
Blue	lux (fc)	0	204 (19)	73 (6.82)	18 (1.71)	8 (0.76)
White	lux (fc)	0	2032 (189)	732 (68)	183 (17)	81 (7.55)
Full colors	lux (fc)	0	3531 (328)	1271 (118)	318 (29.5)	141 (13.1)

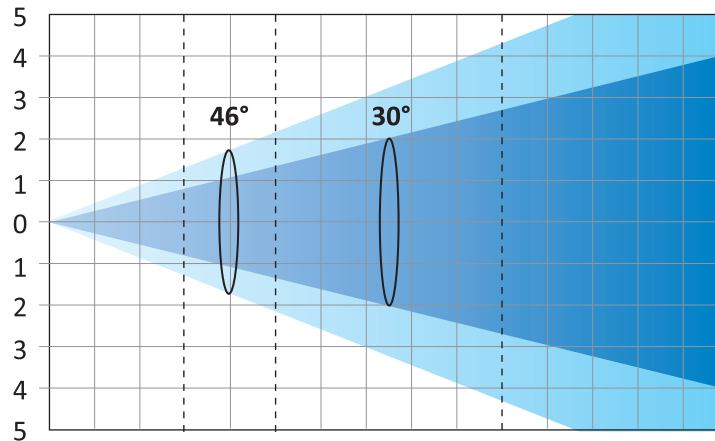

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	2.55 (8' 4")	4.24 (13' 11")	8.49 (27' 10")	12.73 (41' 9")
Diameter 50%	m (ft in)	0	1.61 (5' 3")	2.68 (8' 9")	5.36 (17' 7")	8.04 (26' 4")

# HY B-EYE K15

- EN** PHOTOMETRIC DIAGRAMMS
- IT** DIAGRAMMI FOTOMETRICI
- DE** FOTOMETRISCHE DIAGRAMME

- ES** DIAGRAMAS FOTOMÉTRICOS
- FR** DIAGRAMMES PHOTOMETRIQUES

